ROUTINE EDITOR

Configuration Title

Edited Object

Prompt / Message Line

Routine Editor Version 2.6

Routine name

(Press PF1 then H for help)

==[* MAIN *]===[INSERT]====[FWD]=======================================

Environment Status Line

Text Window

Tab Line

L=======T=======T=======T=======T=======T=======T=======T=======T=======T===
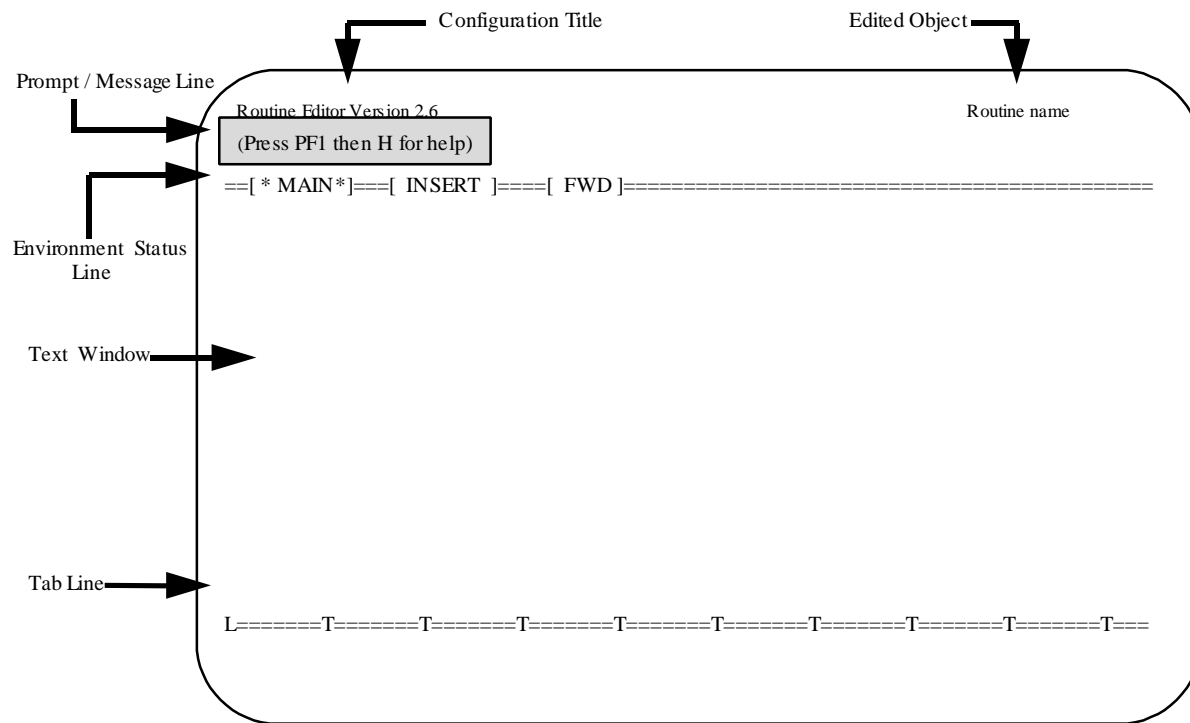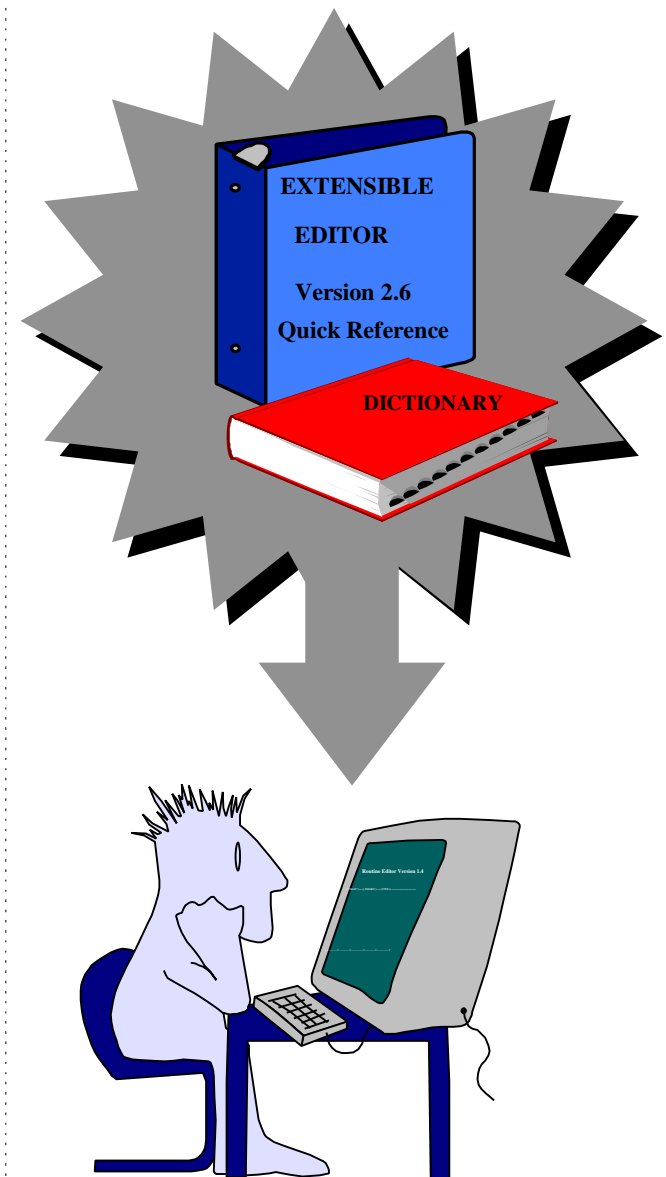
The Extensible Editor provides many editing capabilities not previously available to DHCP users. These include key mapping, block selection, cutting and pasting, text search and replace, multiple buffers, user-define macros, paragraph formatting, and text importing.

EXTENSIBLE

EDITOR

Version 2.6

Quick Reference

DICTIONARY

Routine Editor Version 1.4

EXTENSIBLE EDITOR

REFERENCE AT A GLANCE

Department of Medical Informatics, Indianapolis VAMC

CURSOR MOVEMENT & EXIT
PF1 KEY

[B] Move to bottom of text
[E] Exit, saving all changes
[G] Go to a specific line
[H] Invokes editor help
[L] Move left one word
[N] Move to beginning of next line
[P] Move to end of previous line
[Q] Quit, prompt if changes made
[R] Move right on word
[S] Save changes without exiting
[T] Move to top of text
[?] Help on PF1 key

[left arrow]   Move to left side of display
[right arrow] Move to right side of display
[up arrow]   Move to top of display
[down arrow] Move to bottom of display
[tab]   Move to previous tab stop
[spacebar]   Help on topic

ENVIRONMENT
PF2 KEY

[B] Enable/disable bell
[C] Change search case sensitivity
[D] Change search direction
[I] Change insert/replace mode
[L] Set left margin
[P] Enable/disable position tracking
[R] Set right margin
[S] Save current settings
[T] Change appearance of tab line
[V] Set VT100 compatibility level
[W] Enable/disable line wrap
[X] Clear all tabs
[?] Help on PF2 key

[tab]   Set/clear tab stop

EDITING
PF3 KEY

[A] ASCII character insert
[C] Copy a selection to a buffer
[D] Delete line or selected text
[F] Format paragraph
[I] Import text
[J] Join two lines
[K] Kill (delete) a buffer
[M] Mark (select) a block of text
[O] Output current buffer to a device
[P] Paste into current buffer
[S] Switch buffers
[U] Undelete text block
[W] Wrap current line
[X] Cut selection to a buffer
[?] Help on PF3 key

[left arrow]   Left justify line or block
[right arrow] Right justify line or block
[up arrow]   Center line or block
[down arrow] Center line or block
[return]   Opens/Breaks line at cursor position

FUNCTION
PF4 KEY *

[A] Display a table of ASCII codes
[C] Calculator
[D] Define/delete a macro
[E] Execute a macro
[F] Format comments[1] ; Find term[2]
[L] List macro definitions
[S] Spellchecker[3] ; Routine Size[1]
[X] Define an alias for this configuration
[?] Help on PF4 key

* Configuration dependent
1 Programming configuration only
2 CARE protocol configuration only
3 Default configuration only

CONTROL
CTRL KEY

[B] Move to beginning of current line
[D] Delete character under cursor
[E] Move to end of current line
[F] Find a text string
[H] Delete preceding character
[K] Set command iteration count
[N] Find next occurrence of a string
[P] Paint Screen
[R] Replace a text string
[T] Truncate line at current position
[U] Delete to beginning of line
[W] Toggle between 80 and 132 column display
[Z] Same as pressing PF1 key